




SERVANTE ESD AVEC PLATEAUX

DESCRIPTION

Tube and steel profile mounting
Dissipative gray epoxy coating RAL 7015
Dissipative trays with 7 mm rim
2 swivel ESD wheels with brakes and 2 fixed ESD wheels with tire
Ball bearing hub
Open frame without board
Load capacity of the top and middle plateau: 50 kg

ELECTRICAL SPECIFICATION

Surface resistance : $<10^7 \Omega$
In compliance with the norm : IEC 61340

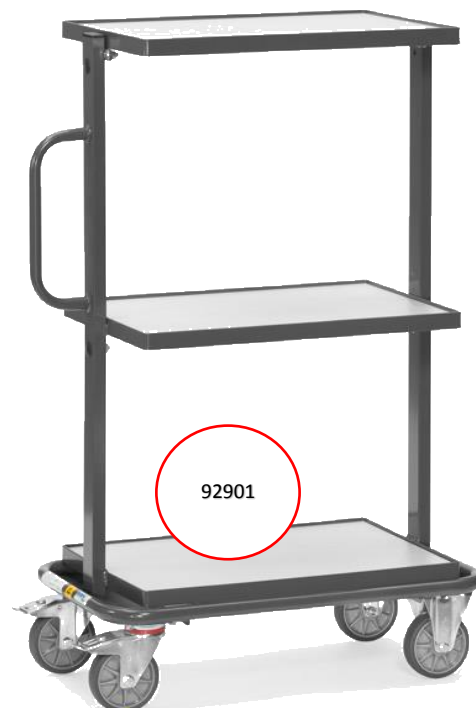

Reference	Charge (kg)	Ø Wheels (mm)	Useful dimensions L x W (mm)	External dimensions L x W x H (mm)	Loading heights (mm)	Weight (kg)
08-0509-92901	200	125	605 x 405	821 x 455 x 1178	216 / 671 / 1171	33
08-0509-92911	200	125	605 x 405	821 x 455 x 1178	216 / 671 / 1171	36



- With upper and intermediate level tiltable in both directions at 15 ° and 30 °
- Blocking by indexing finger

