



01-0402-32281 & 32280

DESCRIPTION

Size from 36 to 48
 Microfiber
 Cold insulating lining
 Adjustable instep area
 Velcro fastening
 Shock absorbant
 PU midsole
 Slip resistance
 PU outsole sole
 Steel toe cap
 Metalfree penetration resistance
 Replaceable acc Wave insole (article no. 3580)
 Sanitized treated
 ESD dissipative according to DIN EN 61340
 Reflective material
 Cushioned ankle support
 Suitable for heel and foot lift
 Conforme aux normes : CE, EN ISO 20345:2011, S3, SRC



REFERENCES	MODELS
01-0402-32281-XX	Black
01-0402-32280-XX	White






SEMELLE D'USURE

- 1_ ESD compatible selon DIN EN 61340
- 2_ SRC-antidérapant selon EN ISO 20345:2011
- 3_ Profil autonettoyant
- 4_ Talon asymétrique pour un positionnement naturel du pied
- 5_ Torsion en TPU
- 6_ Protection de flexion (grande stabilité latérale)
- 7_ Résistance au carburant



3580

Pointure 36-52 (fermé)

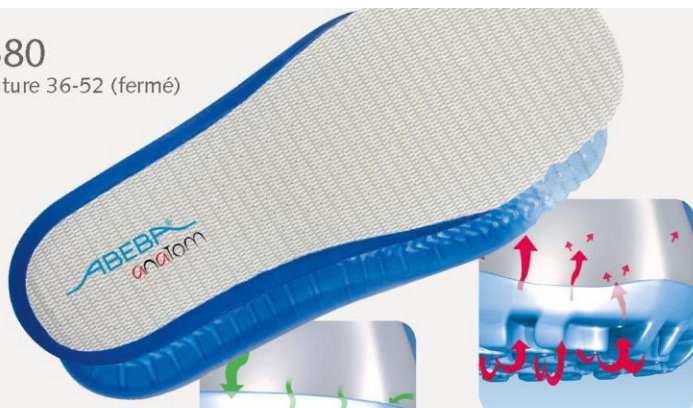

3582

Pointure 36-52 (ouvert)



SEMELLE ANTIPERFORATION
NON-MÉTALLIQUE



TALON ASYMÉTRIQUE



Embout acier

