



01-0402-32156

DESCRIPTION

Size from 36 to 50
 Smooth leather
 Breathable lining with Silver ions
 Instep area with lacing
 Shock absorbant
 PU midsole
 Slip resistance PU outsole sole
 Steel toe cap
 Replaceable acc Wave insole (article no. 3580)
 Sanitized treated
 ESD dissipative according to DIN EN 61340
 Reflective material
 Scratch-resistant coating in heel and toe area
 Suitable for heel and foot lift
 In compliance with the norms : CE, EN ISO 20345:2011, S2, SRC



REFERENCE	MODEL
01-0402-32156-XX	Black






SEMELLE D'USURE

- 1_ ESD compatible selon DIN EN 61340
- 2_SRC-antidérapant selon EN ISO 20345:2011
- 3_Profil autonettoyant
- 4_Talon asymétrique pour un positionnement naturel du pied
- 5_Torsion en TPU
- 6_Protection de flexion (grande stabilité latérale)
- 7_Résistance au carburant


3580

Pointure 36-52 (fermé)

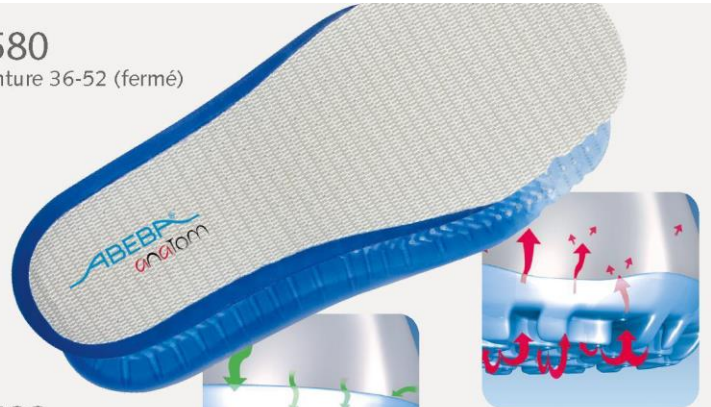

3582

Pointure 36-52 (ouvert)



Embout acier

TALON ASYMÉTRIQUE

