


**01-0402-32168**

## DESCRIPTION

Pointure du 36 au 50  
Smooth leather, black  
Breathable lining with Silver ions  
Instep area with lacing  
Shock absorbant  
PU midsole  
Slip resistance PU outsole sole  
Steel toe cap  
Replaceable acc Wave insole (article no. 3580)  
Sanitized treated  
ESD dissipative according to DIN EN 61340  
Reflective material  
Scratch-resistant coating in heel and toe area  
Conforme aux normes : CE, EN ISO 20345:2011, S2, SRC



REFERENCE	MODEL
01-0402-32168-XX	Black






## SEMELLE D'USURE

- 1\_ESD compatible selon DIN EN 61340
- 2\_SRC-antidérapant selon EN ISO 20345:2011
- 3\_Profil autonettoyant
- 4\_Talon asymétrique pour un positionnement naturel du pied
- 5\_Torsion en TPU
- 6\_Protection de flexion (grande stabilité latérale)
- 7\_Résistance au carburant


3580

Pointure 36-52 (fermé)

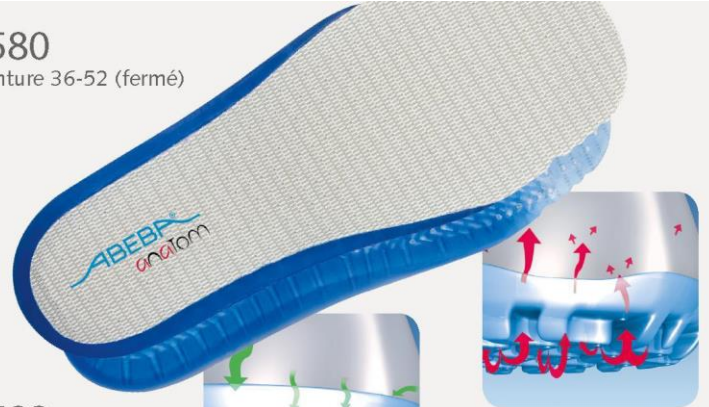

3582

Pointure 36-52 (ouvert)



Embout acier

TALON ASYMÉTRIQUE

