


**01-0402-32270****DESCRIPTION**

Smooth leather, black in ATEX design
Breathable lining with Silver ions
Instep area with lacing
Shock absorbant
PU midsole
Slip resistance PU outsole sole
Steel toe cap
Metalfree penetration resistance
Replaceable acc Wave insole (article no. 3580)
Sanitized treated
ESD dissipative according to DIN EN 61340
Scratch-resistant coating in toe and heel area
In compliance with the norms : CE, EN ISO 20345:2011, S3, SRC

REFERENCE	MODEL
01-0402-32270-XX	Black



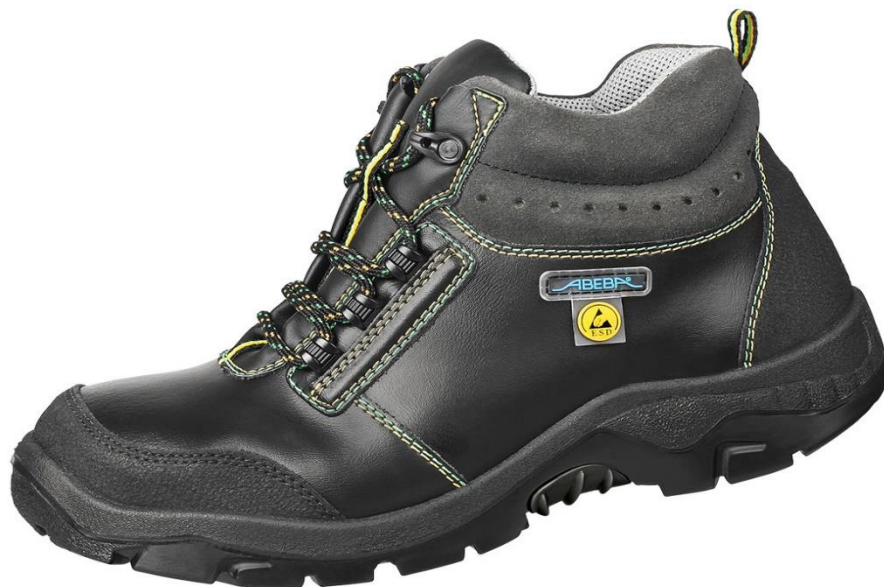

SEMELE D'USURE

- 1_ESD compatible selon DIN EN 61340
- 2_SRC-antidérapant selon EN ISO 20345:2011
- 3_Profil autonettoyant
- 4_Talon asymétrique pour un positionnement naturel du pied
- 5_Torsion en TPU
- 6_Protection de flexion (grande stabilité latérale)
- 7_Résistance au carburant




3580

Pointure 36-52 (fermé)



3582

Pointure 36-52 (ouvert)

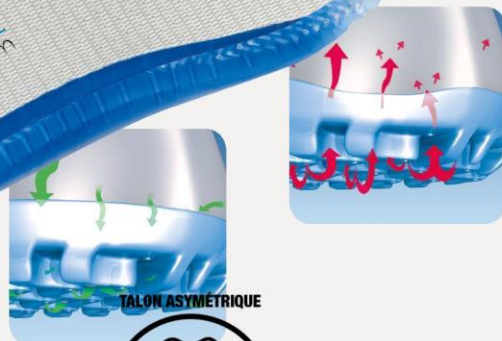

Embout acier



S3

SEMELE ANTIPERFORATION
NON-MÉTALLIQUE

